








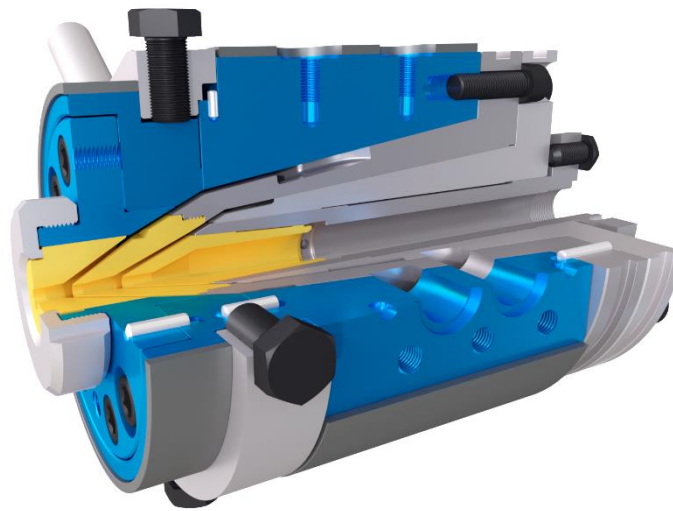






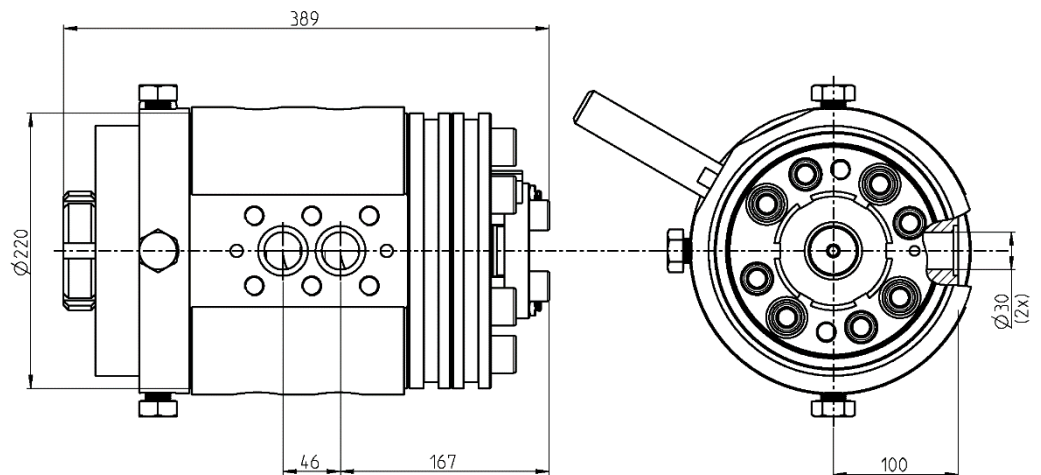


E25GN20

 Multi-layers	 Skin coloration
 Sectoral	 Single layer
 Fix/manual centring	 2 Heating zone(s)
 Die adjustment	 Tip adjustment
 Intermediate Die available	










Power cable	
Data cable	
Special shaped	
Tube	
Multi-layer tube	
HV/MV cable	



Version	Maximum opening of the Tip	Maximum opening of the Die	Main entry port / thread		Auxiliary entry port / thread		Total length	Crosshead diameter	Max. working temperature	Max. working pressure	Weight
			A	B	C	D					
-	25 mm	30 mm	30 mm	-	-	-	389 mm	220 mm	<250°C	500 bars	93 kg

Options

 Vacuum connection	 Extruder connection	 Bypass module	 Telescopic maintenance device	 Trolley or stand	 Customized distributor	 300°C Reinforced heaters			
--	--	--	--	---	---	--	--	--	--