E80AN11

EROCARB
SWISS MADE EXTRUSION
CROSSHEAD & TOOLING

Skin coloration

Striping

Single layer

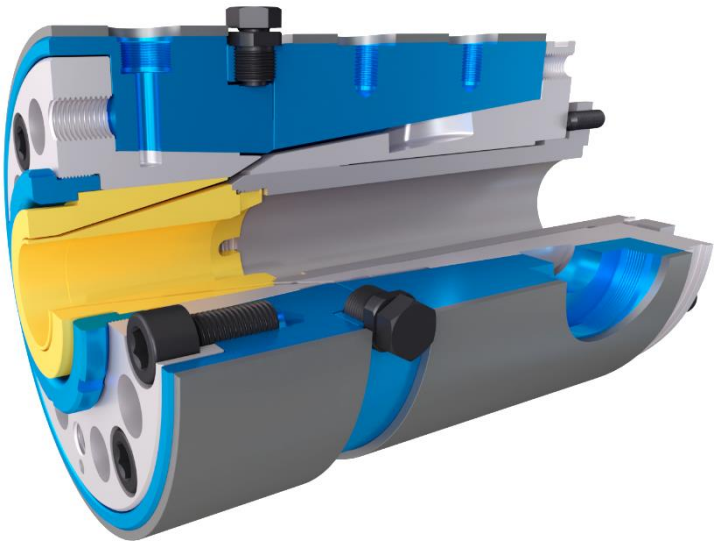

Power cable

Data cable

Special shaped

Tube

HV/MV cable

Manual centring

2 Heating zone(s)

Die adjustment

Tip adjustment

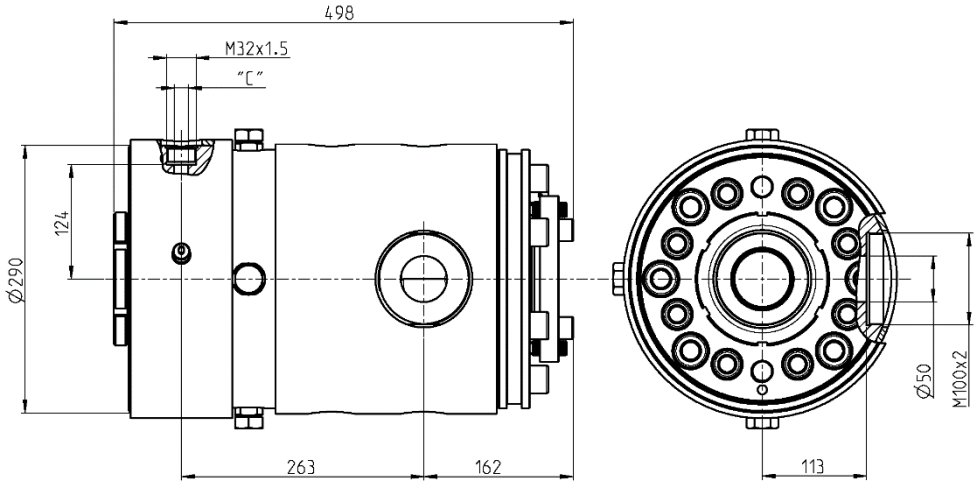

Version	Maximum opening of the Tip	Maximum opening of the Die	Main entry port / thread		Auxiliary entry port / thread		Total length	Crosshead diameter	Max. working temperature	Max. working pressure	Weight
			A	B	C	D					
Normal	80 mm	95 mm	50 mm	M100x2	15 mm	M32x1.5	498 mm	290 mm	<250°C	500 bars	200 kg
HFFR					20 mm						

Options

Vacuum connection

Extruder connection

Bypass module

Telescopic maintenance device

Trolley or stand

Customized distributor

300°C Reinforced heaters

EROCARB SA
La Pomelaz 6
1429 Giez, Switzerland

Phone: +41 24 446 23 03
Fax: +41 24 446 23 51

E-Mail: info@erocarb.ch
Web: www.erocarb.ch